SIEMENS

Product data sheet

3RW4055-6BB44



SIRIUS SOFT STARTER, S6, 134 A, 75 KW/400 V, 40 DEG., 200-460 V AC, 230 V AC, SCREW TERMINALS

General details:				
product brand name		SIRIUS		
Product equipment				
 integrated bridging contact system 		Yes		
• thyristors		Yes		
Product function				
intrinsic device protection		Yes		
motor overload protection		Yes		
 evaluation of thermal resistor motor protection 		No		
reset external		Yes		
 adjustable current limitation 		Yes		
inside-delta circuit		No		
Product component / outlet for enine brake		No		
Reference code				
according to DIN EN 61346-2		Q		
 according to DIN 40719 extended according to IEC 204-2 / according to IEC 750 		G		
Power Electronics:				
Product designation		soft starters for standard applications		

Operating current



• at 40 °C / rated value	А	134
• at 50 °C / rated value	А	117
• at 60 °C / rated value	А	100
Emitted mechanical power / for three-phase servomotors		
• at 230 V / at standard switching / at 40 °C		
rated value	W	37,000
• at 400 V / at standard switching / at 40 °C		
rated value	W	75,000
yielded mechanical performance (hp) / for three-phase squirrel cage motors / at 200/208 V / at standard circuit / at 50 $^\circ\text{C}$ / rated value	hp	30
Operating frequency		
rated value	Hz	50 60
Relative negative tolerance / of the operating frequency	%	-10
Relative positive tolerance / of the operating frequency	%	10
Operating voltage / with standard circuit / rated value	V	200 460
Relative negative tolerance / of the operating voltage / with standard circuit	%	-15
Relative positive tolerance / of the operating voltage / with standard circuit	%	10
Minimum load in % of I_M	%	20
Adjustable rated current / of the motor / for motor overload protection / minimum	A	59
Continuous operating current in % of I_e / at 40°C	%	115
Active power loss / at operating current / at 40°C / during operating phase / typical	W	60
Control electronics:		
Voltage type / of control feed voltage		AC
Control supply voltage frequency / 1 / rated value	Hz	50
Control supply voltage frequency / 2 / rated value	Hz	60
Relative negative tolerance / of the control supply voltage frequency	%	-10
Relative positive tolerance / of the control supply voltage frequency	%	10
Control supply voltage / 1		
• at 50 Hz / for AC	V	230
• at 60 Hz / for AC	V	230
Relative negative tolerance / of the control supply voltage / at 60 Hz / for AC	%	-15
Relative positive tolerance / of the control supply voltage / at 60 Hz / for AC	%	10
Type of display / for fault signal		red



Mechanical design:		
Size of the engine control device		S6
Width	mm	120
Height	mm	198
Depth	mm	250
Mounting type		screw fixing
mounting position		With additional fan: With vertical mounting surface +/- 90° rotatable, with vertical mounting surface +/- 22.5° tiltable to the front and back Without additional fan: With vertical mounting surface +/-10° rotatable, with vertical mounting surface +/- 10° t
Distance, to be maintained, to the ranks assembly		
• upwards	mm	100
• sidewards	mm	5
downwards	mm	75
Installation altitude / at a height over sea level	m	5,000
Cable length / maximum	m	300
Number of poles / for main current circuit		3
Electrical connections:		
Design of the electrical connection		
for main current circuit		busbar connection
 for auxiliary and control current circuit 		screw-type terminals
Number of NC contacts / for auxiliary contacts		0
Number of NO contacts / for auxiliary contacts		2
Number of changeover contacts / for auxiliary contacts		1
Type of the connectable conductor cross-section / for main contacts / for box terminal / when using the front clamping point		
 finely stranded / with conductor end processing 		16 70 mm²
 finely stranded / without conductor end processing 		16 70 mm²
• stranded		16 70 mm2
Type of the connectable conductor cross-section / for main contacts / for box terminal / when using the back clamping point		
 finely stranded / with conductor end processing 		16 70 mm²
 without conductor final cutting / without conductor end processing 		16 70 mm²
• stranded		16 70 mm2
Type of the connectable conductor cross-section / for main contacts / for box terminal / when using both clamping points		
 finely stranded / with conductor end processing 		max. 1x 50 mm², 1x 70 mm²
 without conductor final cutting / without conductor end processing 		max. 1x 50 mm², 1x 70 mm²




07/01/2014


• stranded		max. 2x 70 mm2	
Type of the connectable conductor cross-section / for AWG conductors / for main contacts / for box terminal			
when using the back cl		6 2/0	
when using the front c		6 2/0	
• when using both clampi		max. 2x 1/0	
Type of the connectable conductor cross-section / for DIN cable lug / for main contacts	_		
• finely stranded		16 95 mm2	
• stranded		25 120 mm2	
Type of the connectable conductor cross-section	_		
 for AWG conductors / for main contacts 		4 250 kcmil	
Type of the connectable conductor cross-section	_		
• for auxiliary contacts			
• solid		2x (0.5 2.5 mm²)	
 finely stranded / with conductor end processing 		2x (0.5 1.5 mm²)	
 for AWG conductors / for auxiliary contacts 		2x (20 14)	
 finely stranded / with wire end proc 		2x (20 16)	
Ambient conditions:			
Ambient temperature			
• during operating	°C	-25 +60	
• during storage	°C	-40 +80	
Derating temperature	°C	40	
Protection class IP	_	IP00	
Certificates/approvals:			
General Product Approval	EMC	For use in hazardous locations	Test Certificates
	С-ТІСК	κ ATEX	Special Test Certificate
Shipping Approval	other		
GL Covd's Register LRS	Declaration of Conformity	of Environmental Confirmations	
UL/CSA ratings			
yielded mechanical performance (hp) / for three-phase squirrel			
cage motors			
• at 220/230 V / at standard circuit			




• at 460/480 V / at standard circuit				
• at 50 °C / rated value	hp	75		
Contact rating designation / for auxiliary contacts / according to UL		B300 / R300		
Further information:				
Information- and Downloadcenter (Catalogs, Brochures,) http://www.siemens.com/industrial-controls/catalogs				
Industry Mall (Online ordering system) http://www.siemens.com/industrial-controls/mall				
CAx-Online-Generator http://www.siemens.com/cax				
Service&Support (Manuals, Certificates, Characteristics, FAQs,) http://support.automation.siemens.com/WW/view/en/3RW4055-6BB44/all				
Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams,) http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3RW4055-6BB44				




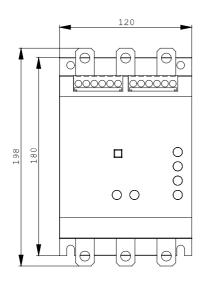

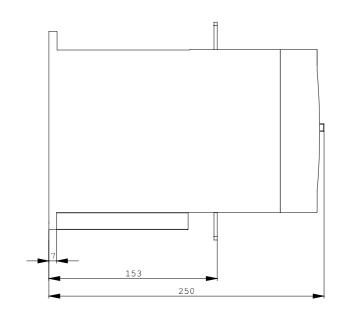

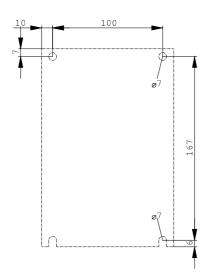



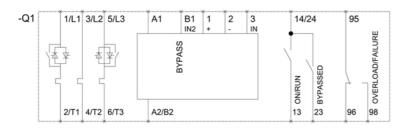

last change:

Jun 16, 2014

