

SIEMENS

Product data sheet

3RV1021-1FA15

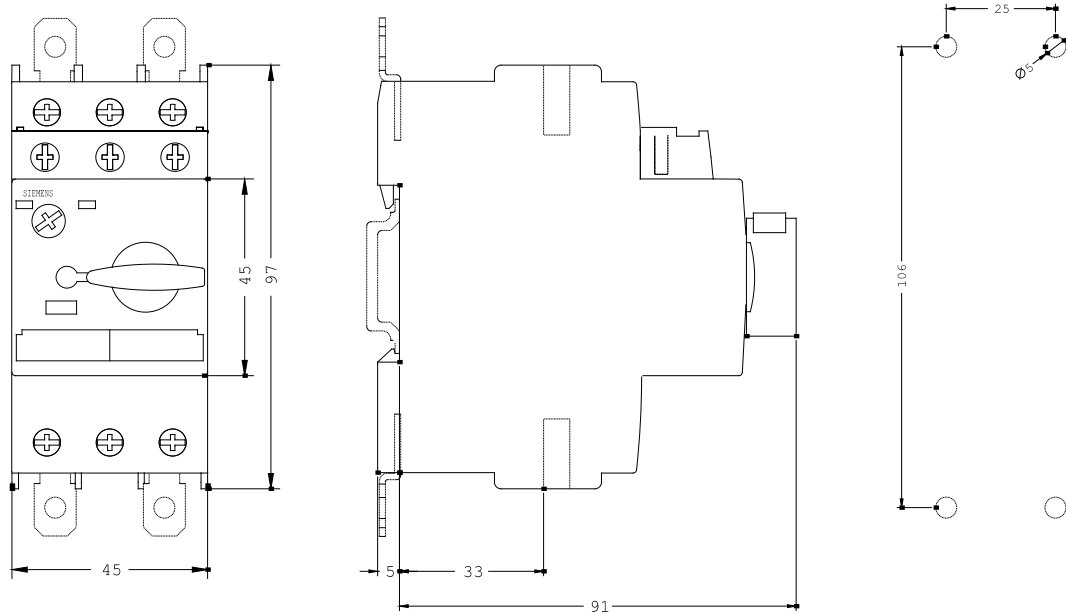

Abb. ähnlich / similar picture

CIRCUIT-BREAKER, SIZE S0,
FOR MOTOR PROTECTION, CLASS 10,
A REL.3.5...5 A, N REL. 65 A,
SCREW CONNECTION,
STANDARD BREAKING CAPACITY W. TRANSV.
AUX. SWITCH 1NO/1NC

General technical details:

Continuous current / rated value	5 A
Adjustable response current	
• of the non-delayed short-circuit release	
• initial value	65 A
• final value	65 A
• of the current-dependent overload release	
• initial value	3.5 A
• final value	5 A
Switch-off capacity limit short-circuit current / at 400 V / rated value	100 kA
Type of voltage	AC/DC
Service power	
• at AC-3 / at 400 V / rated value	1.5 kW
• for three-phase servomotors / rated value	1.5 kW
Number of poles	3
Number of NC contacts / for auxiliary contact	1
Number of NO contacts / for auxiliary contact	1
Number of change-over switches / for auxiliary contact	0

Trip class	CLASS 10
Product function / Overload protection	Yes
Mechanical design:	
Design of the electrical connection / for main current circuit	screw-type terminals
Design of the auxiliary switch	transverse
Type of fixing/fixation	screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 50022
Product component / auxiliary switch	Yes
Size of the circuit-breaker	S0
Ambient conditions:	
Protection class IP	IP20



last change:

11/02/2006

Technical Assistance:	Telephone:	+49 (0) 911-895-5900 (8°° - 17°° CET)
	Fax:	+49 (0) 911-895-5907
	E-Mail:	technical-assistance@siemens.com
	Internet:	www.siemens.de/lowvoltage/technical-assistance