

Output coupler with plug-in Relay, 1 change-over contact Spring-type terminal (push-in) 24 V AC/DC Enclosure width 6.2 mm Thermal current 6A



Figure similar

Product brand name	SIRIUS
Product category	SIRIUS 3RQ3 coupling relays in slim design
Product designation	Coupling relays with plug-in relay
Design of the product	Output coupling link
Product type designation	3RQ3

General technical data	
Display version LED	Yes
Product component	
• Relay output	Yes
• semi-conductor output	No
Insulation voltage	
• for overvoltage category III according to IEC 60664	
— with degree of pollution 3 rated value	300 V
Surge voltage resistance rated value	4 kV
maximum permissible voltage for safe isolation	
• between control and auxiliary circuit	300 V

Percental drop-out voltage related to the input voltage	10 %
Protection class IP	IP20
Shock resistance	sinusoidal half-wave 15g / 11 ms
• acc. to IEC 60068-2-27	
Vibration resistance	6 ... 150 Hz: 2 g
• acc. to IEC 60068-2-6	
Operating frequency maximum	72 000 1/h
Switching behavior	monostable
Mechanical service life (switching cycles)	10 000 000
• typical	
Electrical endurance (switching cycles)	100 000
• at AC-15 at 230 V typical	
Thermal current	6 A
Reference code	K
• acc. to IEC 81346-2:2009	
• acc. to DIN EN 61346-2	

Control circuit/ Control	
Control supply voltage at AC	24 V
• at 50 Hz rated value	
• at 60 Hz rated value	24 V
Control supply voltage frequency	50 Hz
• 1 rated value	
• 2 rated value	60 Hz
Control supply voltage at DC	24 V
• rated value	
Operating range factor control supply voltage rated value at DC	0.8
• initial value	
• Full-scale value	1.25
Operating range factor control supply voltage rated value at AC at 50 Hz	0.8
• initial value	
• Full-scale value	1.25
Operating range factor control supply voltage rated value at AC at 60 Hz	0.8
• initial value	
• Full-scale value	1.25
Switch-on delay time	12 ms
• at AC maximum	
• at DC maximum	12 ms
Off-delay time	14 ms

Closing delay	
• at AC	12 ms
• at DC	6 ms
Opening delay	
• at AC	14 ms
• at DC	13 ms
Design of the relay operating mechanism	poled
Product component Plug-in socket	Yes

Short-circuit protection

Design of the fuse link	
• for short-circuit protection of the auxiliary switch required	fuse gG: 4 A

Auxiliary circuit

Type of switching contact	Changeover contact
Material of switching contacts	AgSnO ₂
Number of CO contacts	
• for auxiliary contacts	1
Operating current of auxiliary contacts at AC-15	
• at 24 V	3 A
• at 250 V	3 A
Operating current of auxiliary contacts at DC-13	
• at 24 V	1 A
• at 125 V	0.2 A
• at 250 V	0.1 A
Contact reliability of auxiliary contacts	one incorrect switching operation of 100 million switching operations (17 V, 5 mA)

Main circuit

Type of voltage	AC/DC
------------------------	-------

Inputs/ Outputs

Property of the output Short-circuit proof	No
---	----

Outputs

Ampacity of the output relay at AC-15	
• at 250 V at 50/60 Hz	3 A
Ampacity of the output relay at DC-13	
• at 24 V	1 A
• at 125 V	0.2 A
• at 250 V	0.1 A

Electromagnetic compatibility

EMC emitted interference	
• acc. to IEC 60947-1	ambience A (industrial sector)

EMI immunity	
<ul style="list-style-type: none"> • acc. to IEC 60947-1 	corresponds to degree of severity 3
Conducted interference	
<ul style="list-style-type: none"> • due to burst acc. to IEC 61000-4-4 	2 kV
<ul style="list-style-type: none"> • due to conductor-earth surge acc. to IEC 61000-4-5 	2 kV
<ul style="list-style-type: none"> • due to conductor-conductor surge acc. to IEC 61000-4-5 	1 kV
Field-bound parasitic coupling acc. to IEC 61000-4-3	10 V/m
Electrostatic discharge acc. to IEC 61000-4-2	6 kV contact discharge / 8 kV air discharge

Display

Display version	
<ul style="list-style-type: none"> • as status display by LED 	LED green

Connections/Terminals

Product function	
<ul style="list-style-type: none"> • removable terminal 	No
Type of electrical connection	
<ul style="list-style-type: none"> • for auxiliary and control current circuit 	PUSH-IN connection (spring-loaded connection)
Wire length	
<ul style="list-style-type: none"> • at AC maximum 	500 m
<ul style="list-style-type: none"> • at DC maximum 	1 000 m
Type of connectable conductor cross-sections	
<ul style="list-style-type: none"> • solid 	1x (0.25 ... 2.5 mm ²)
<ul style="list-style-type: none"> • finely stranded with core end processing 	1x (0.25 ... 1.5 mm ²)
<ul style="list-style-type: none"> • finely stranded without core end processing 	1x (0.25 ... 2.5 mm ²)
<ul style="list-style-type: none"> • at AWG conductors solid 	1 x (20 ... 14)
<ul style="list-style-type: none"> • at AWG conductors stranded 	1x (20 ... 14)
Connectable conductor cross-section	
<ul style="list-style-type: none"> • solid 	0.25 ... 2.5 mm ²
<ul style="list-style-type: none"> • finely stranded with core end processing 	0.25 ... 1.5 mm ²
<ul style="list-style-type: none"> • finely stranded without core end processing 	0.25 ... 2.5 mm ²
AWG number as coded connectable conductor cross section	
<ul style="list-style-type: none"> • solid 	20 ... 14
<ul style="list-style-type: none"> • stranded 	20 ... 14

Installation/ mounting/ dimensions

Mounting position	any
Mounting type	snap-on mounting
Height	93 mm
Width	6.2 mm
Depth	76 mm

Required spacing	
<ul style="list-style-type: none"> • with side-by-side mounting <ul style="list-style-type: none"> — forwards — Backwards — upwards — downwards — at the side • for grounded parts <ul style="list-style-type: none"> — forwards — Backwards — upwards — at the side — downwards • for live parts <ul style="list-style-type: none"> — forwards — Backwards — upwards — downwards — at the side 	<ul style="list-style-type: none"> 0 mm 0 mm 0 mm 0 mm 0 mm 0 mm 0 mm 0 mm 0 mm 0 mm 0 mm 0 mm 0 mm 0 mm 0 mm

Ambient conditions

Installation altitude at height above sea level	
<ul style="list-style-type: none"> • maximum 	2 000 m
Ambient temperature	
<ul style="list-style-type: none"> • during operation • during storage • during transport 	<ul style="list-style-type: none"> -25 ... +60 °C -40 ... +85 °C -40 ... +85 °C
Relative humidity	
<ul style="list-style-type: none"> • during operation 	10 ... 95 %

Certificates/approvals

General Product Approval	Declaration of Conformity	Marine / Shipping
--------------------------	---------------------------	-------------------



CCC



CSA



UL



EG-Konf.



DNVGL.COM/AF

other

[Confirmation](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RQ3118-2AB00>

Cax online generator



<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RQ3118-2AB00>


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RQ3118-2AB00>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RQ3118-2AB00&lang=en

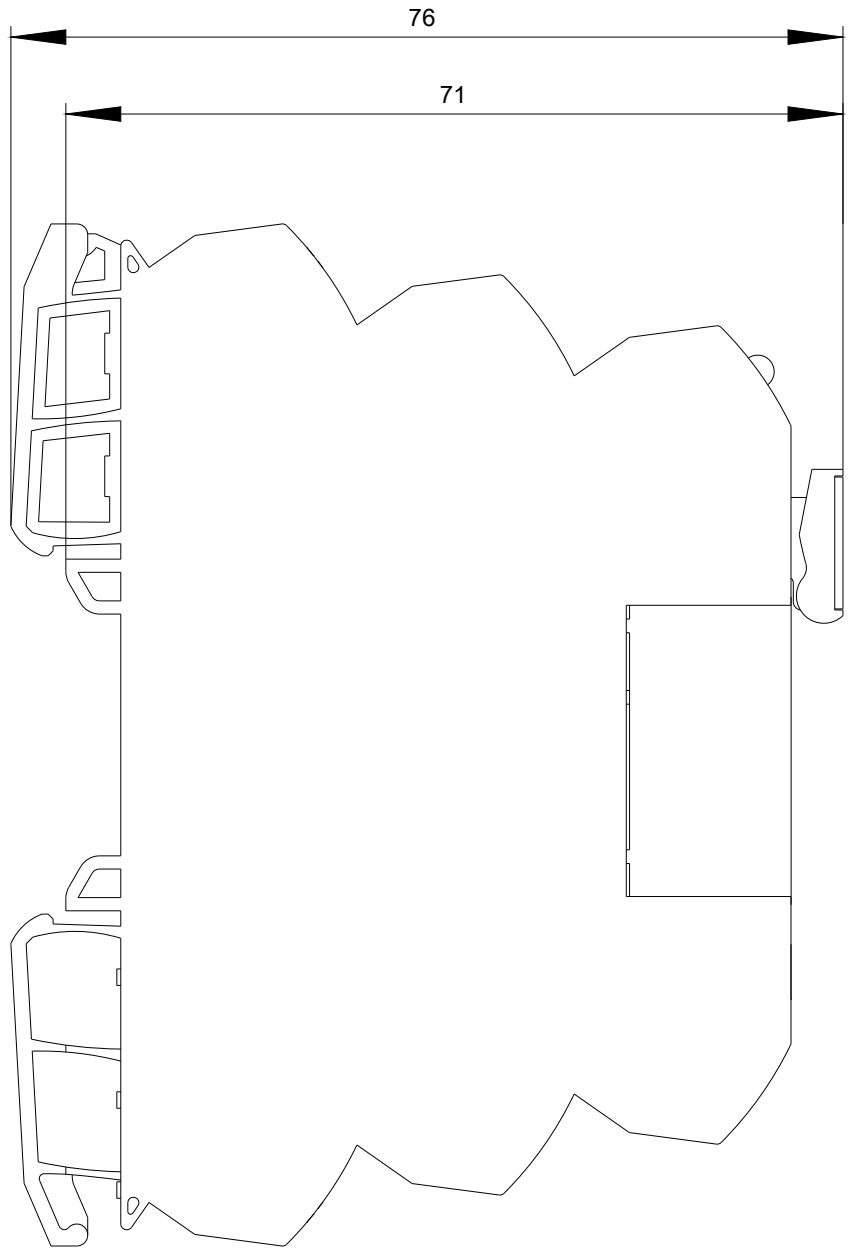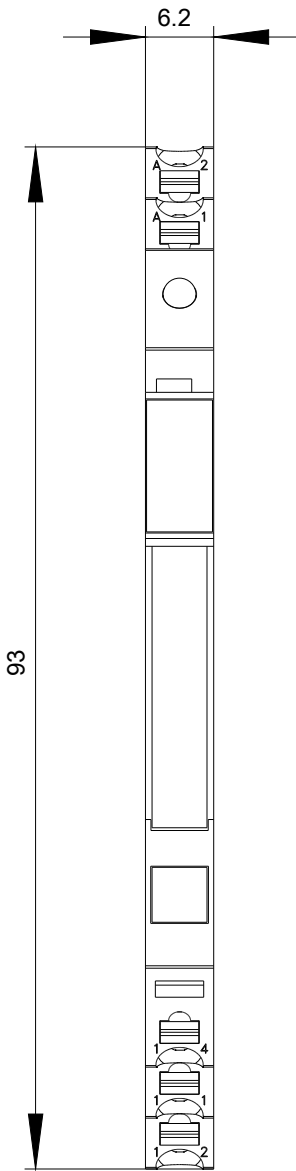

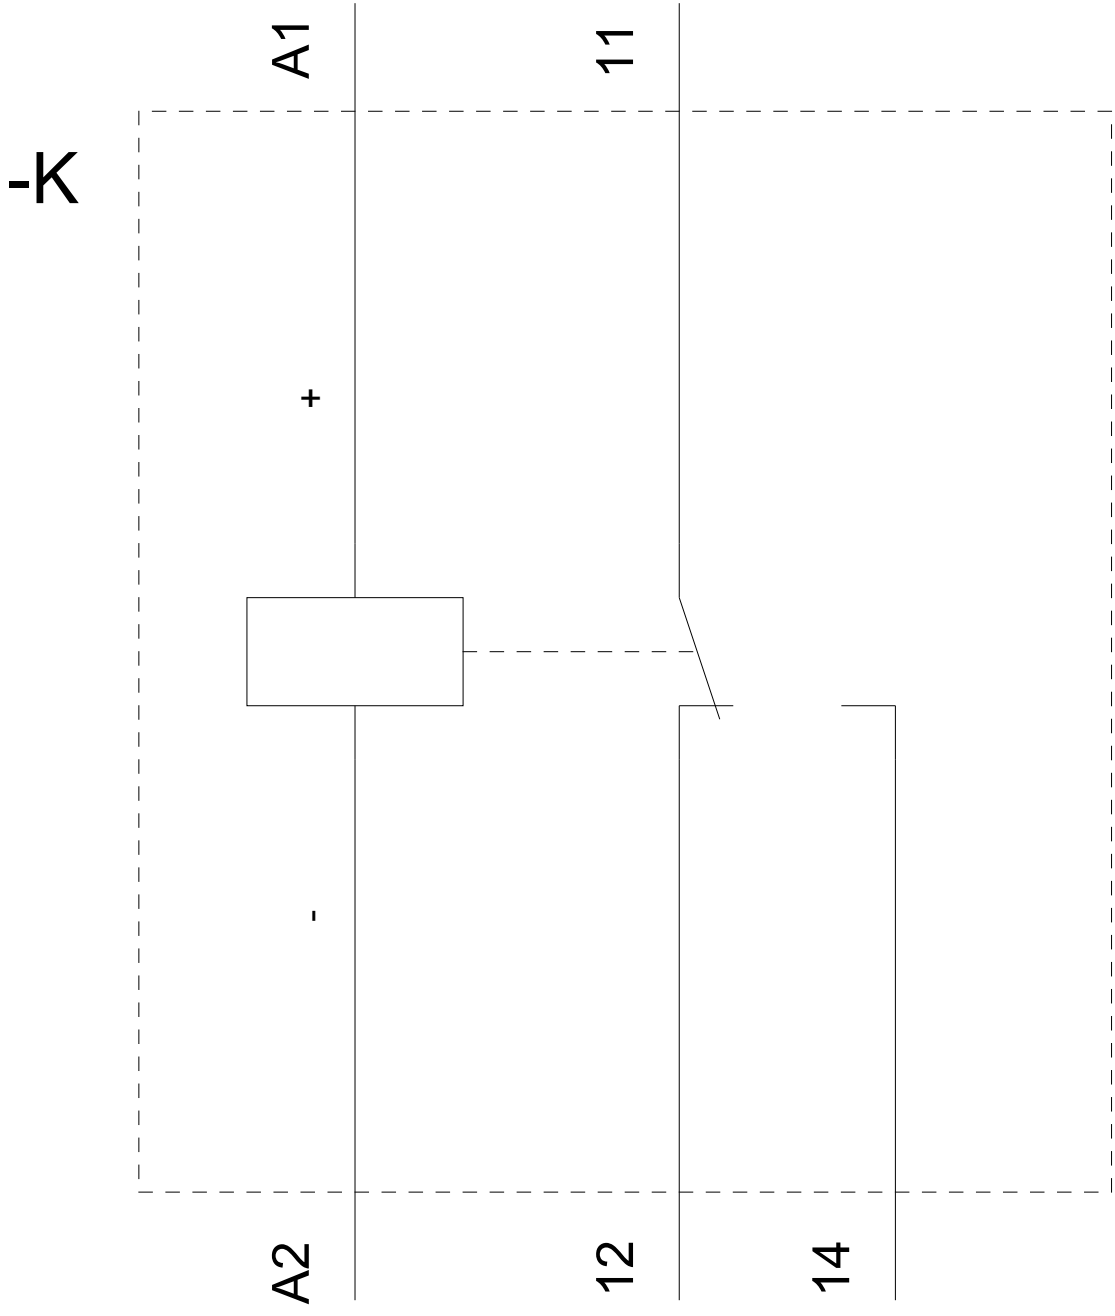

last modified:

05/17/2018